

Space Shuttle Propulsion Master's Forum Presentation Mitigating Risk through Testing

> Jody Singer Deputy, Shuttle Propulsion Office

> > May 12-15, 2010


## **Mitigating Risk Through Testing**



**A1 Final SSME Test** 



**B2 MPTA Test** 

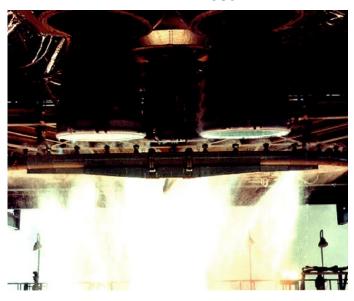

**MPTA Tank Removal** 



### What is the Space Shuttle?

- World's first reusable heavy-lift spacecraft
- It is the most complex machine ever built
- Launches vertically (a rocket), carries crew, logistics, experiments and maneuvers in Earth orbit (a spacecraft), lands like a airplane
- Each Space Shuttle has a design life of 100 missions
  - 131 total missions to date; 18 since *Columbia* accident
- Space Shuttle is a unique national asset

It has more than 2.5 million parts

230 miles of wire

nearly 1,100 valves and connectors

almost 1,500 circuit breakers

and over 27K insulated tiles and thermal blankets

### **Space Shuttle Capabilities**

- Cargo/payload delivery and retrieval
  - Up to 26 tons of payload capacity to orbit
  - Up to 20 tons of payload capacity on re-entry
    - 1,690,000 lbs returned to earth\*
- On-orbit assembly and service (ISS, HST)
  - 53,658,000 lbs of hardware delivered to space\*
    - 902,000 lbs delivered to ISS\*
- Crew transfer (ISS) 193 different visitors to ISS/15 countries
- Satellite retrieval and repair
- On-orbit, point-to-point maneuvering of people and cargo
- Science payloads/Space Lab/SpaceHab
- **EVA** capable





On-orbit Assembly




Crew Transfer




Cargo Return


# **Shuttle Propulsion Office**

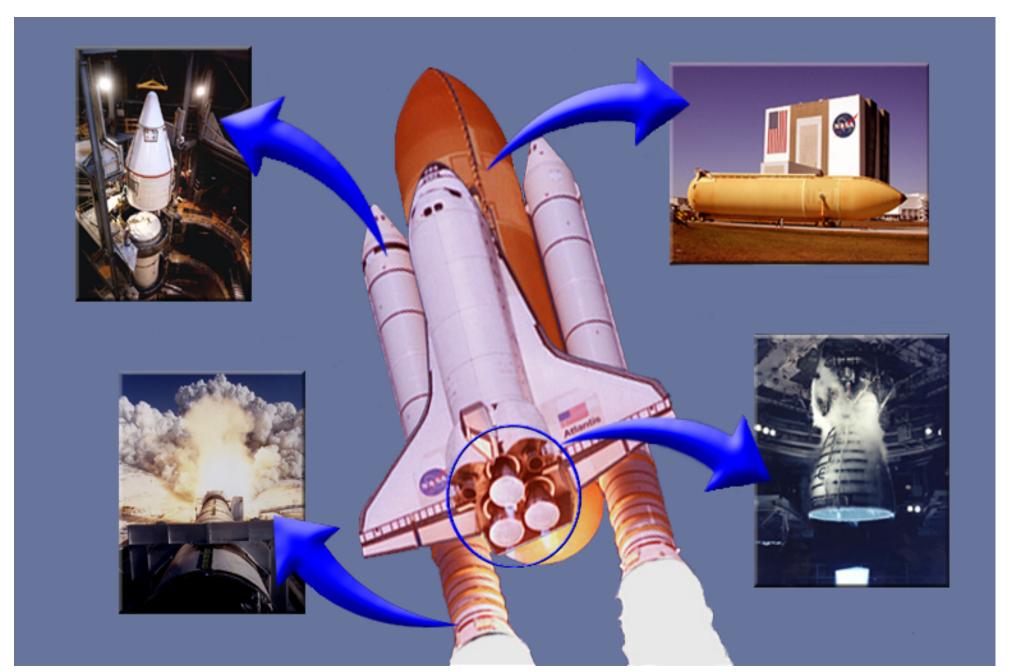


## **Space Shuttle and Contractor Partners**

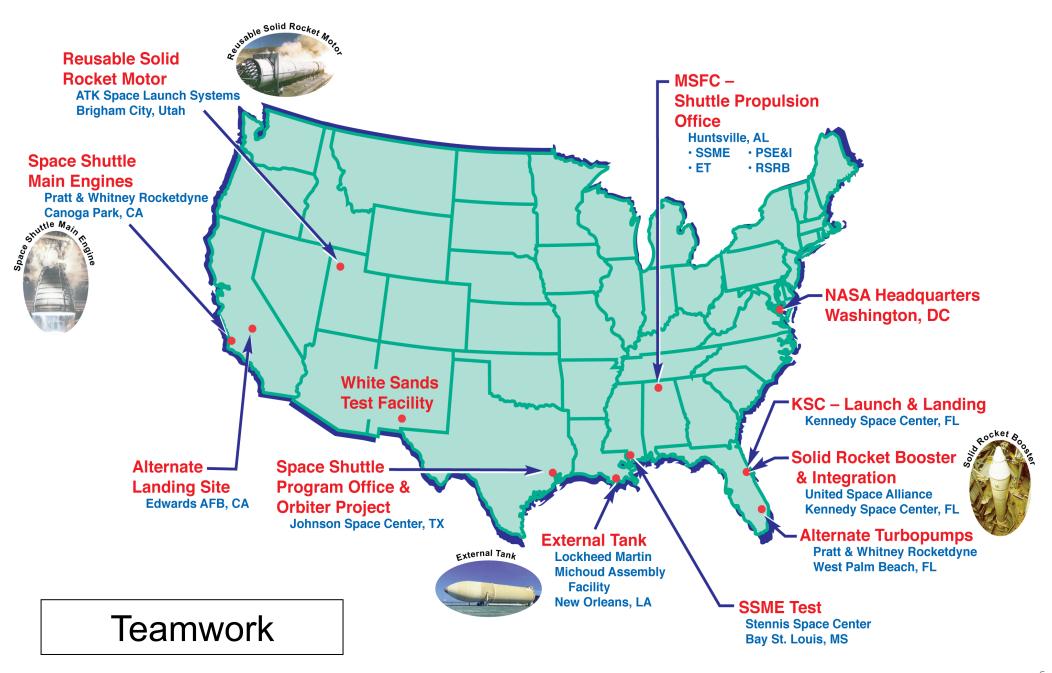

## **Space Shuttle Main Engine (SSME)**

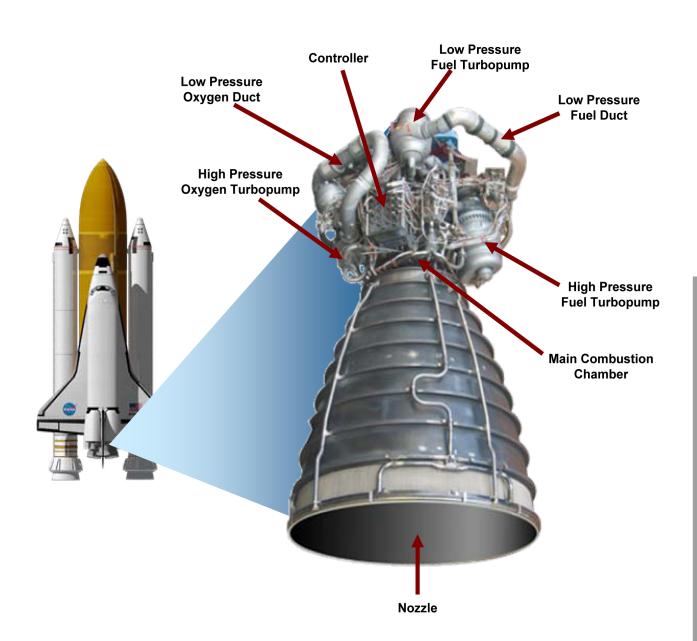

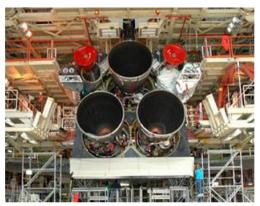


#### Manufactured by:

Pratt & Whitney/ Rocketdyne Power, Inc. Canoga Park, CA

LENGTH	14 ft (4.3 meters)
DIAMETER	7.5 ft (2.3 meters)
# PER FLIGHT	3
PROPELLANTS	liquid hydrogen and liquid oxygen from the External Tank
THRUST	418,000 lbs (189,600 kg) sea-level
Ignition to	Approx. 8.6 mins
LIFETIME	7.5 hours, 55 starts

# Space Shuttle Main Engine (SSME) Overview


- 3 main engines operate for 8 1/2 minutes during ascent
- Sole source of propulsion once the Solid Rocket Motors are separated at T+120 seconds
- Engines have performed safely for all 130 launches (as of STS 130)
- 51 engines have flown 130 engine missions
  - One in-flight shutdown (STS-51F July 29, 1985)
- Total seconds of operation 1,088,031

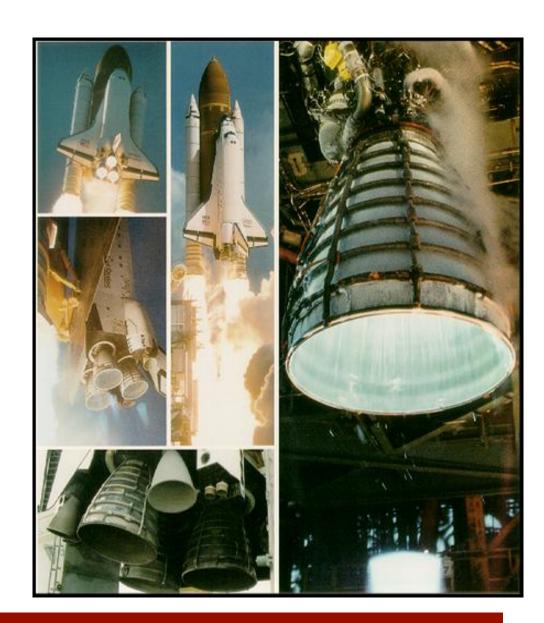

# Space Shuttle Main Engine Amazing Facts




High Pressure Fuel Turbopump (HPFTP)
 alone delivers as much horsepower as 28
 locomotives and can drain an average-size
 swimming pool in 28 seconds!

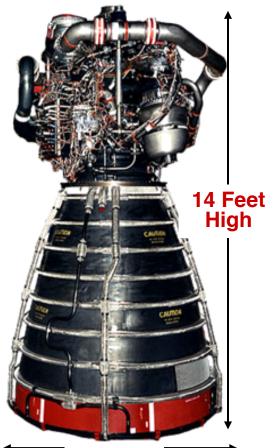

First Stage
Turbine Blade



- Turbine Blades are one of the most critical components on the <u>Shuttle</u>
- The turbine blades spin at 600 revolutions per second/700 HP



- Three main engines operate for 8 minutes and 40 seconds for each flight, with a combined output of 37 million horsepower (HP).
- Engine operates at temperatures from -423° F (liquid hydrogen to cool engine) to 6,000° F (hotter than the boiling point of iron!)
- Three engines produce equivalent power of 23 Hoover Dams
- World's highest efficiency reusable LOX/Hydrogen engine

# **Space Shuttle Main Engine (SSME)**

### **Characteristics**

## **Operational**

• Propellants	Oxygen/Hydrogen	Main Combustion Chamber     Pressure	2,871 psia
<ul> <li>Thrust @ Rated power leven</li> <li>100%</li> </ul>	el (RPL) 469,448 lb	<ul><li>Main Combustion Chamber Temperature</li><li>Fuel Flow rate</li></ul>	6,000° F 155 lb/sec
10070		- Tuel How late	
<ul> <li>Thrust @ Nominal power log</li> <li>(NPL) 104.5%</li> </ul>	evel 490,847 lb	<ul> <li>HPFTP Turbine Discharge</li> <li>Temperature</li> </ul>	1,119° F
• Thrust @ Full power level (FPL) 109%	(FDL)	HPFTP Discharge Pressure	5,943 psia
	FPL) 512,271 lb	HPFTP Speed	
• Chamber proceure (100%)	0/\	<ul> <li>Oxidizer Flow rate</li> </ul>	33,913 rpm
Chamber pressure (109%)	2,994 psia	HPOTP Turbine Discharge	933 lb/sec
Specific impulse at altitude	452 sec	Temperature	768° F
<ul><li>Throttle range (%)</li></ul>	67 to 109	HPOTP Discharge Pressure	
• Weight	7,748 lb	HPOTP Speed	4,040 psia
			22,357 rpm

# Space Shuttle Main Engine (SSME) Hot Fire History

- Through March of 2010, SSME has been hot-fired 3,156 times
  - 1,088,031 seconds during flights and ground tests
- First SSME tests conducted on May 19, 1975 at the Mississippi Test Facility (now the Stennis Space Center)
  - Six years of development test prior to first launch in 1981
  - 37 tests required to reach minimum power level (50% RPL at the time)
     during initial start sequence development (12 turbopump replacements)
  - 95 tests required to reach 100% power level
  - Initial flight start sequence implemented in 1978
    - 10 engine failures incurred during this time period
    - Further modifications to start sequence required as engine upgrades implemented
  - 726 tests on 24 engines for 110, 252 seconds prior to STS-1
- Last SSME test occurred at Stennis Space Center (SSC) on July 2009

### **SSME Active Test Program Is a Key to Success**

- Since 1996, 59 consecutive launches have occurred without an SSME related delay
- Three Test Phases.....
  - <u>SSME Development Testing:</u>
    - Prior to STS-1, SSME had 726 starts / 110,000 seconds
    - Certification Test demonstrated boundary of performance on ground before flight
    - Historically, 75% of total engine development cost are from "test failures" which identify key risks early
      - Reduces likelihood of failure and consequences of the failure in flight

#### - Operational Testing:


- Acceptance test of approved hardware design
- Resolve anomalies (cycle testing, production anomaly, tolerance stack up, environments and repairs (flight specific or fleet issue)
- Performance envelope and increased life limits
- Drives inspection techniques for continued safety of flight
- Test of other components on vehicle impact to SSME (MPS interface, flight rule changes, etc.)

#### - Off-nominal Testing:

- Extensive knowledge on engine operations
- Determining margins against undesirable conditions
- Increased launch capability
- Future design configurations
- Increased safety upgrades


# **Space Shuttle Main Engine (SSME) Design Improvements**

**First Manned Orbital Flight** 




Baseline **Engine** 

**Full Power** Level



- Powerhead
- Ducts
- HPFTP
- HPOTP
- LPFTP
- LPOTP Avionics
- Nozzle

Phase II




- HPFTP
- HPOTP
- MCC
- LPF Duct Helium **Barrier**
- Avionics/Valves

**Block I** 




- Two Duct Powerhead
- Single Tube HEX
- HPOTP
- HPFTP EDM Inlet
- Thermocouples

**Block IIA** 



- Large Throat MCC
- Main Injector Modifications
- Block II LPOTP
- Block II LPFTP
- A-Cal Software
- Pressure Sensor

**Block II** 



- HPFTP
- Main Fuel Valve
- Non-Integral **Spark Igniter**
- Advanced Health Management System (active)

STS-1 1981

STS-6 1983

STS-26R 1988

**STS-70** 1995


**STS-89** 1998

STS-104 2001

STS-117 2007-today

**Block Change Philosophy** 

### **External Tank**

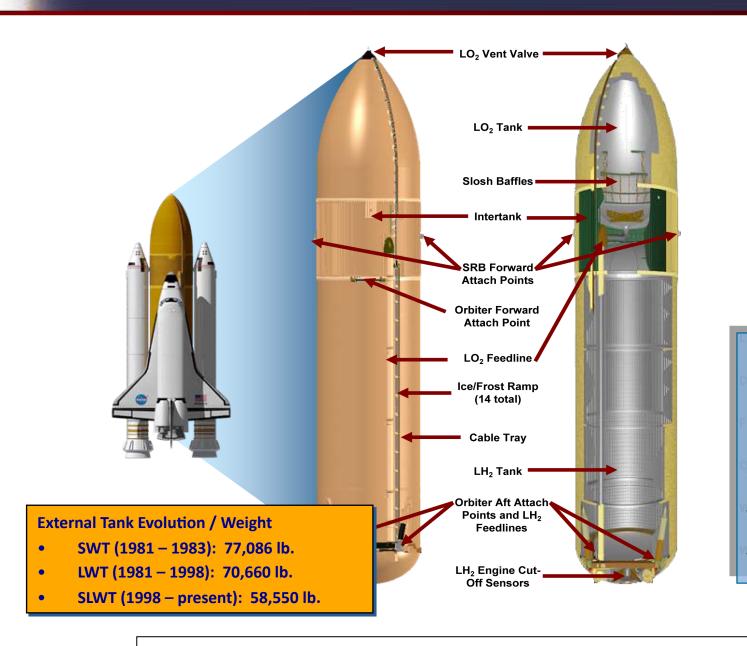



Manufactured by:
Lockheed Martin Space
Systems Company (LMSSC)
Michoud Assembly Facility
(GOCO Facility)
New Orleans, LA

**LENGTH** 153.8 ft

(46.9 meters)

**DIAMETER** 27.6 ft

(8.4 meters)

FUEL liquid hydrogen

385,265 gallons

-423°F

OXIDIZER liquid oxygen

143,351 gallons

-300°F

WEIGHT, EMPTY 66,000 lbs

(29,937 kg)

WEIGHT, FUELED 1,655,600 lbs

(750,967 kg)

Design Improvements through a Block Change Philosophy


### **External Tank Overview**

#### • The External Tank

- Serves as the structural backbone of the shuttle during launch operations
- Contains and delivers Liquid
   Hydrogen (LH<sub>2</sub>) and Liquid Oxygen
   (LO<sub>2</sub>) propellants for the Orbiters
   three main engines

#### • Three structural elements

- The LO<sub>2</sub> tank and LH<sub>2</sub> tank pressure vessels are welded assembly of machined and formed panels, barrel sections, ring frames and dome sections
- The Intertank is a cylindrical mechanically joined assembly with flanges at each end for joining the LO<sub>2</sub> and LH<sub>2</sub> tanks

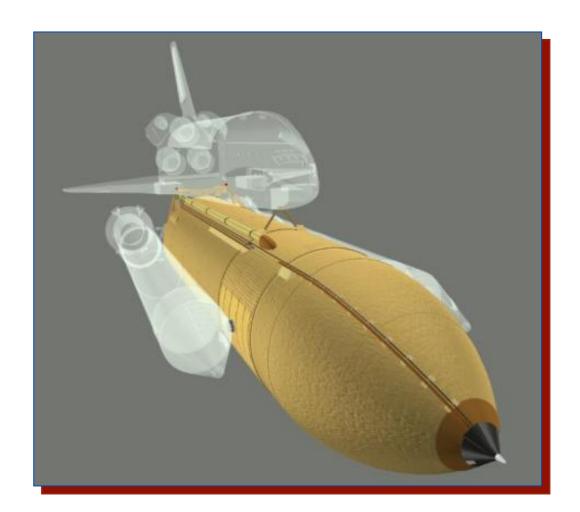

# Space Shuttle External Tank (ET) Amazing Facts




 The External Tank is manufactured at Michoud Assembly Facility in Louisiana. The building is 43 acres under one roof!







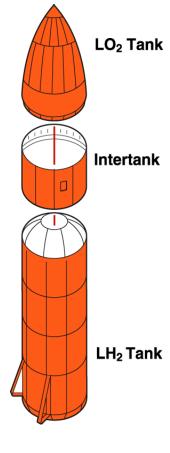

 Skin of the ET is less than 0.25 inches thick, yet holds more than 1.5

Only major expendable

shuttle element

- holds more than 1.5 million pounds of propellant
- Holds 380,000 gallons of liquid hydrogen (–423° F)
- 140,000 gallons of liquid oxygen (-300° F)
- 2,993 feet (~over ½ mile of critical welding per tank.
- ET covered with spray-on foam insulation that keeps the LH<sub>2</sub> at -423° F even in the hot sun ~ 1/3 acre of foam surface
- Weighs 1.6 million pounds at liftoff: equal to 32,000 elementary school children

 The ET is taller than the Statue of Liberty and is the structural backbone of the Shuttle vehicle

## **ET Critical Developmental Testing**

- Material testing
  - Foams/Ablative Materials
  - Adhesion Testing

#### Component Testing

- Structural
- Functional Testing

#### •Major Ground Testing:

- 1. Structural Test Article (STA) over 1,100 strain gauges
  - •LH2, LO2 and (2) inter tanks
- 2.Mated Ground Vibration Test
  - Design information for guidance and control systems
    - (ET, RSRM & SRB (loaded and inert), and orbiter)
- 3. Main Propulsion Test Article:
  - •Simulated orbiter aft section, 3 engines, flight weight ET, flight weight fuselage

## ET Testing is Critical throughout the life of the program.....

- MPT ET <u>Pre-Flight Testing</u>
  - Verified Subsystem Performance Requirements
  - Validated and Anchored Analytical Models
  - Developed Propellant Loading and De-tanking Procedures
  - Identified Problematic Hardware, Optimized Requirements and Procedures Prior to Flight
- ET <u>Production Test and Verification</u>
  - LH<sub>2</sub> and LO<sub>2</sub> Systems Proof and Leak Testing
  - Propulsion Systems Verification Testing
  - Electrical Systems Verification Testing
- ET Flight/Development test have enabled Block upgrades resulting in over 18,000 pound weight reductions
  - MPT Development of Pre-Flight Data
  - SWT Generated Developmental Flight Loads Data
  - LWT Reduced ET Weight from SWT Flight Loads Data
  - SLWT Optimized ET Weight from LWT Flight Loads Data
- 1.4 Factor of Safety to 1.25 weight but after extensive structural tests were completed
- ET Successfully Evolved and Continues to Fly Based on Testing and Verification Approach
  - Significant redesigns and processing improvements have been accomplished since STS-107
  - Our understanding of risk has improved
    - Understanding of failure mechanisms is based upon testing and flight observations

### **External Tank RTF Major Continuous Risk Reduction**


ET-121 RTF Modifications
Bipod Fitting and Feedline
Bellows Heater



ET-124 Hail Damaged Tank



ET-129/127/130/131 TPS Producibility Enhancements





2005 TS-114

2006

78-115 19-115 19-116 278-116

7TS-11:

2008 17S-122 77 17S-123 711 17S-124 2009 278-139 775-139 775-127 775-128 775-128 775-128 775-128

2010 STS-130 2/08

Baseline SLWT






ET-119 RTF II Modifications PAL Ramp Removal



ET-120 LH<sub>2</sub> IFR Redesign Demonstration



ET-128, First In-line Tank LO<sub>2</sub> Feedline Brackets and LH<sub>2</sub> IFRs

#### **Processing Improvements**


- Low Spray Guns
- Human Factors
- Lead In Lead Out
- Video Review Of Sprays
- Improved Mats
- NDE
- Producibility Enhancements
- GUCP Improvements
- Friction Stir Welding

#### **Design Improvements**

- Bipod Fitting
- Bellows Heater
- Feedline Camera
- PAL Removal
- LH IFRs
- LO2 Ti Brackets
- ECO Feed Through
- Sixth Buy Tanks

#### Post Flight Assessment

- Imagery
- Failure Mode Assessment
- CAD Modeling
- EPAT Process
- · Historical Data Base
- Statistical Assessments

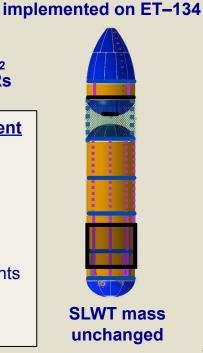


Al 2219 Complex

**Curvature Panels, and** 

**Friction Stir Welding fully** 

## Reusable Solid Rocket Booster (RSRB)

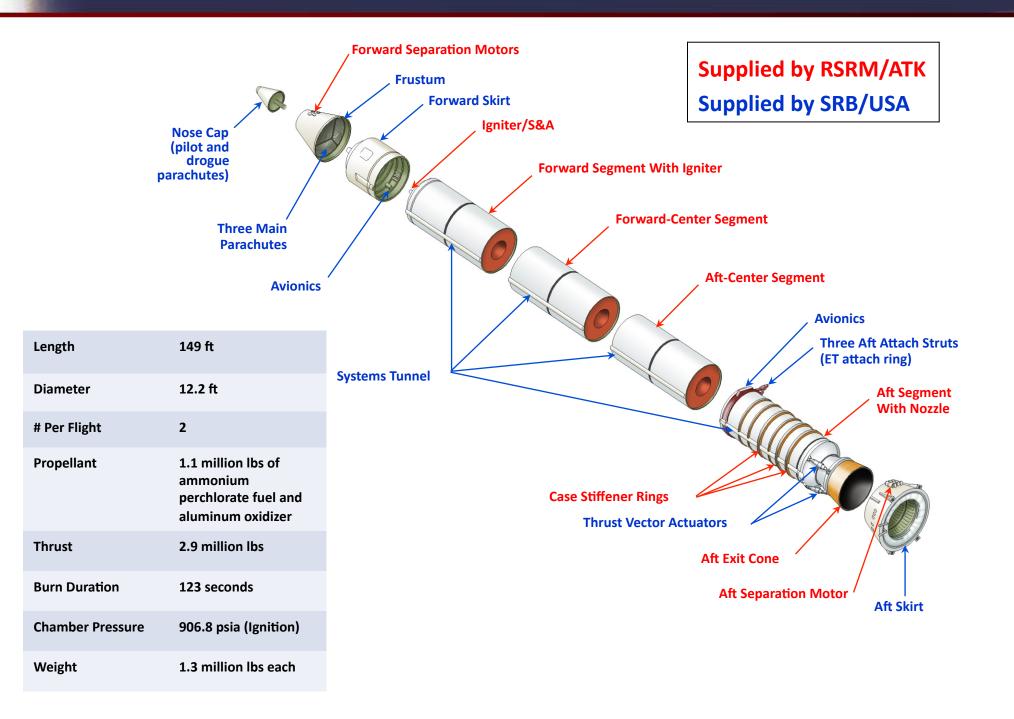

# Reusable Solid Rocket Booster (RSRB) Overview


- Twin RSRBs burn for 123 seconds during ascent
- Provide 80% of thrust required to achieve liftoff
- Recovered 120 to 160 miles downrange from KSC
- Case segments are returned to manufacturer in Utah for refurbishment
  - Four cast segments per motor
  - Designed for 20 flight reuse
  - Each segment filled with approx. 280,000 lbs of propellant
  - Shipped via rail to/from KSC
- Segment cases made from D6AC steel
- RSRM shelf life is five years
  - Flight specific age life extension to 5.5 yrs
- 260 motors launched (RSRM and SRM)
- 1 Ares I-X Motor
- 52 full scale static tests
  - Development, Qualification, Engineering Test, Disposal
  - Includes one 5-segment Engineering Test Motor




# Reusable Solid Rocket Booster (RSRB) Overview

Shuttle and MLP interface Transmit RSRM thrust to Shuttle Attach ET and SRB	Structures	Aft Skirt Hold Down Studs and Frangible Nuts Forward Skirt ET Attach Ring and Struts
Shuttle steering through SRB Separation	Avionics and Flight Controls	Aft Integrated Electronics Assembly (IEA) Rate Gyro Assemblies (RGA) Thrust Vector Control System (TVC) Batteries
Shuttle Destruct System	Range Safety System (RSS)	RSS Safe and Arm Device Linear Shape Charge (LSC) Command Receiver Decoder RSS Antennae
SRB Separation	Separation System	Booster Separation Motors Forward Separation Bolt Aft Separation Bolts/Attach Struts
SRB Descent and Recovery	Recovery System	Altitude Switch Assemblies (ASA) Nose Cap Thrusters Pilot and Drogue Parachutes Ordnance Separation Ring and LSC Main Parachutes Salt Water Activated Release (SWAR) System

# Space Shuttle Solid Rocket Booster/ Reusable Solid Rocket Motor Amazing Facts

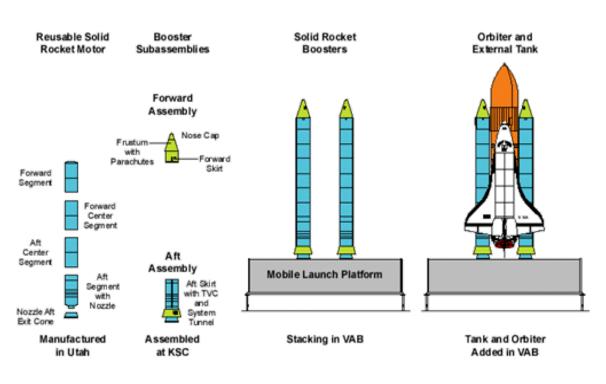







- World's largest solid rocket
- 149.1 feet high and 12.2 feet wide (1/2 football field long only 2 feet shorter than the Statue of Liberty)
- Each RSRM equivalent output during flight is 15,400,000 hp or about 51,300 Corvettes.
- Two RSRMs produce more thrust than thirty-two 747 jets at takeoff power or 14,700 six-axle diesel locomotives.
- RSRM combustion gas temperature approaches 6,000° F, approximately two-thirds the temperature of the sun's surface. At this temperature steel does not melt, it boils.
- Produces 2.6 million pounds of thrust at liftoff more than 32 747s at take-off power
- Boosters go to full power in 2/10th of a second the heat they produce in the first 2 minutes could heat 87,000 houses for one full day.
- After 2 minutes, boosters separate at 28 miles altitude at a speed of 3,100 mph. They coast upward for 13 miles before beginning their fall.
- Three 136-foot wide parachutes slow the SRBs to a safe splashdown in the Atlantic Ocean.
- · Boosters are recovered, refurbished and reused.
- The boosters are the heaviest object ever to be parachuted safely back to the surface!

# Reusable Solid Rocket Booster (RSRB) RSRM Development & Qualification Program Philosophy

- Solid Rocket Motor (SRM) Pre-51L Design
  - Full scale static tests before first flight
    - Four Development Motors (DM)
    - Three Qualification Motors (QM)
- Reusable Solid Rocket Motor (RSRM) –
   Post 51L Design
  - Full scale static tests before first flight
    - One Engineering Test Motor (ETM)
    - Two Development Motors (DM)
    - Two Qualification Motors (QM)
    - PVM-1: Flaw test (primary O-ring)



Philosophy: "Test before you fly"

### **RSRM Ground Test Program**

### **Commitment to a Robust Motor Test Program**

FSM (Flight Support Motor): Full-scale test motor (typically one per year) with focus on testing all finalized changes before first flight

• 16 FSMs (last motor fired 2/2010)

FVM (Flight Verification Motor): Special designation for two "Mid-Life and Full-Life" full-scale aged test motors built for flight (RSRM-89 de-stacked and returned to Utah)

- FVM-1 was 3.9 yrs old
- FVM-2 was 7.2 yrs old

PRM (Production Rate Motor): Full-scale test motor fired prior to post-Columbia return-to-flight that provided process validation during periods of reduce production rates

TEM (Technical Evaluation Motor): Full-scale test motors with a variety of purposes including evaluation of extended exposure to Florida environment (returned to Utah due to age life)


• 2 TEMs for RSRM (11 pre-RSRM)

ETM (Engineering Test Motor): Full-scale test motor focused on the "off-nominal" – flaw, margin, and "physics based" knowledge testing

3 ETMs (including one 5-segment motor)

MNASA (48") and SRTM (24"): Subscale test motors – focus is evaluation and down-selection of material and design changes, analytical model anchoring, etc.

24 MNASA and 17 SRTM

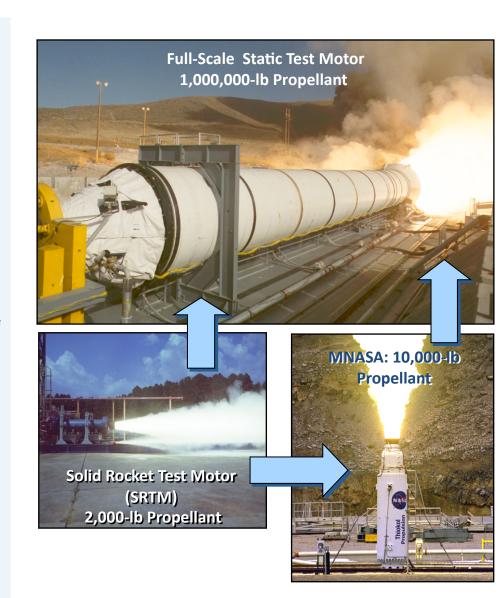

# Reusable Solid Rocket Booster (RSRB) SRB Development Tests

- SRB Hardware Verification Description
  - SRB Primary Structures were analyzed and tested.
    - Mated Vehicle Ground Vibration Test (MVGVT)
    - Static Test Articles (STA)
  - Component Level/Integrated System test:
    - Electrical and Instrumentation (E&I) System was developed and Flight Certified at the component level and tested in integrated system level
  - Component Level developed and flight certified:
    - Recovery and Separation Pyrotechnics systems and Booster Separation Motors
    - Range Safety Destruct System
  - Thrust Vector Control (TVC) System was developed and Flight Certified at the component level and performance tested as a full TVC system at MSFC
  - Thermal Protection System (TPS) was developed, tested and verified at MSFC
  - DDT&E Flights

# Reusable Solid Rocket Booster (RSRB) SRB Structural Testing

#### Structural Tests

- Structural tests were performed to determine the ability of SRB structure to withstand predicted static and dynamic forces which may be encountered in assembly, storage, transportation, handling, flight, and recovery. Structural tests were performed on the largest practical assemblies of structural hardware.
- Mated Vehicle Ground Vibration Test (MVGVT)
  - Full size Solid Rocket Booster structures, Solid Rocket Motor inert segments, External Tank and Orbiter Simulator were integrated and vibration tested at MSFC.
- Static Test Article (STA)
  - All major SRB structures were subjected to static loads equivalent to 140% of flight loads.
  - Aft Skirt Forward Skirt Frustum Nose Cap External Tank Attach
     Ring

# Mitigating Risk Through Testing

"Test before you fly"



### **Main Propulsion Test (MPT)**

### ET Developmental Testing

- MPT Test Hardware Description
  - Full size SWT External Tank (ET), Space Shuttle Aft compartment complete with full Main Propulsion Systems (MPS) and three Space Shuttle Main Engines (SSME). Propellant Tanking and Full Duration MPS Static Firing tests on B2 Test Position at Stennis Space Center (1979).
- ET MPT Test Objectives
  - Verify Subsystem Performance Requirements
    - SSP Volume X Requirement Verification
    - Instrumentation and Electrical Performance Verification
    - Thermal Protection System performance Verification
    - Environmental Conditioning (Purges) and Compartment Venting Verification
  - Validate and Anchor Analytical Models
    - Thermal Models
    - Pressurization Models
    - Structural Load Models
    - Resonate (Vibration) Models
  - Develop Propellant Loading and De-tanking Procedures
    - Tanking Tables
    - Launch Commitment Criteria (LCC)
    - KSC Ground Operations Maintenance and Requirement Specification Documents (OMRSD)
  - Identify Problematic Hardware, Optimize Requirements and Procedures Prior to Flight

### **Verification Process**

#### Methodology


Verification approach consistent thru Standard Weight Tank (SWT), Light Weight Tank
 (LWT) and Super Light Weight Tank (SLWT) verification programs

Design Verification

(Assure design meets required Factor of Safety)

Acceptance Verification


(Assure workmanship and absence of any flaw that will cause failure in use)

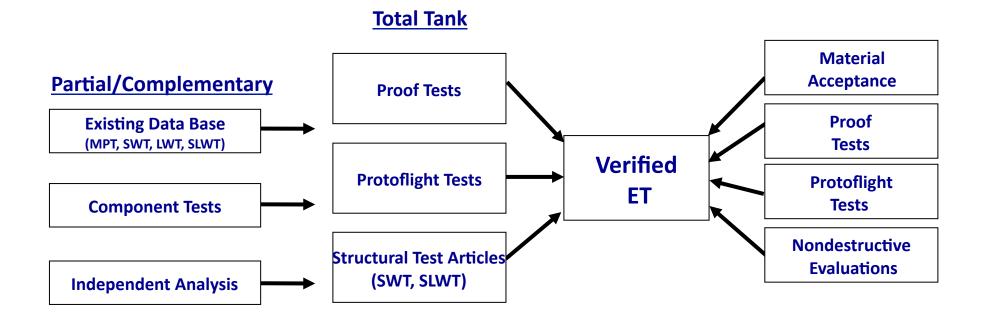

## **Quality Assurance Process**


### Safety

A Systems Approach to Safety Program Management

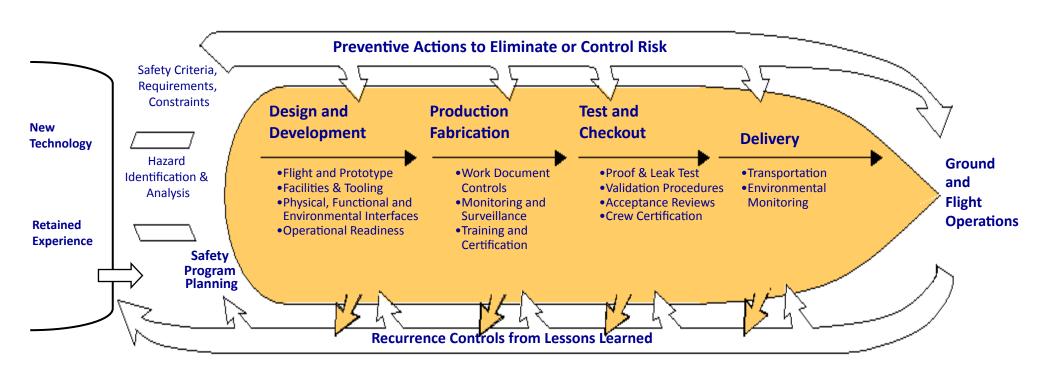


• Failure Analysis Accident/Incident Investigation Performance Evaluation and Trends Post Flight Analysis

# STS-114, External Tank - 121 RTF Modifications "Bipod Ramps Removed"

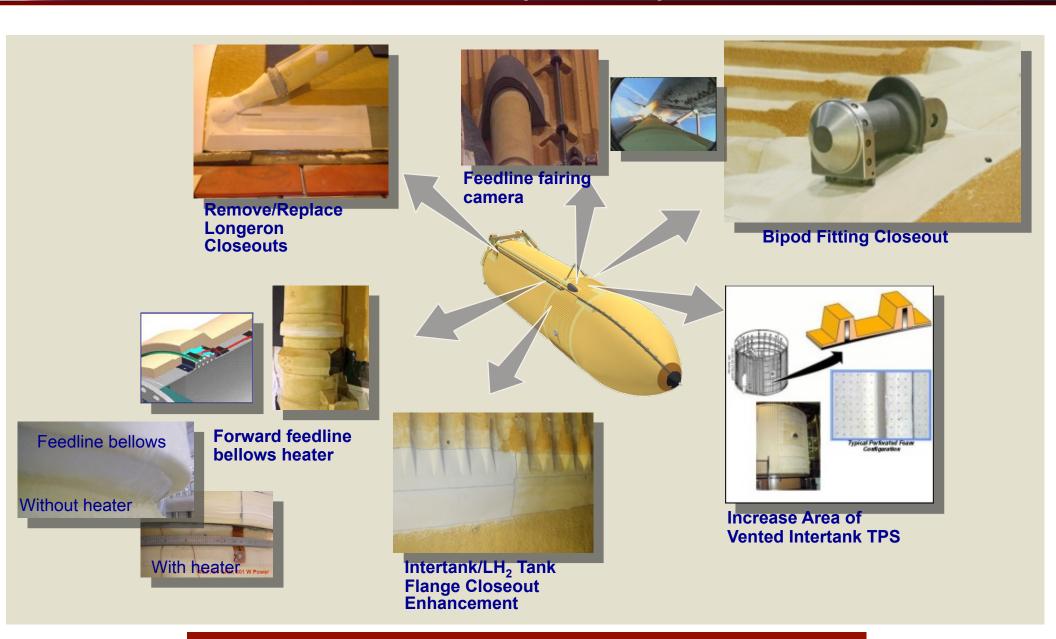


RTF I: ET-121 modifications to reduce foam and ice debris. The bipod ramp was eliminated.

# STS-121, External Tank - 119 RTF-II Modifications "PAL Ramps Removed"

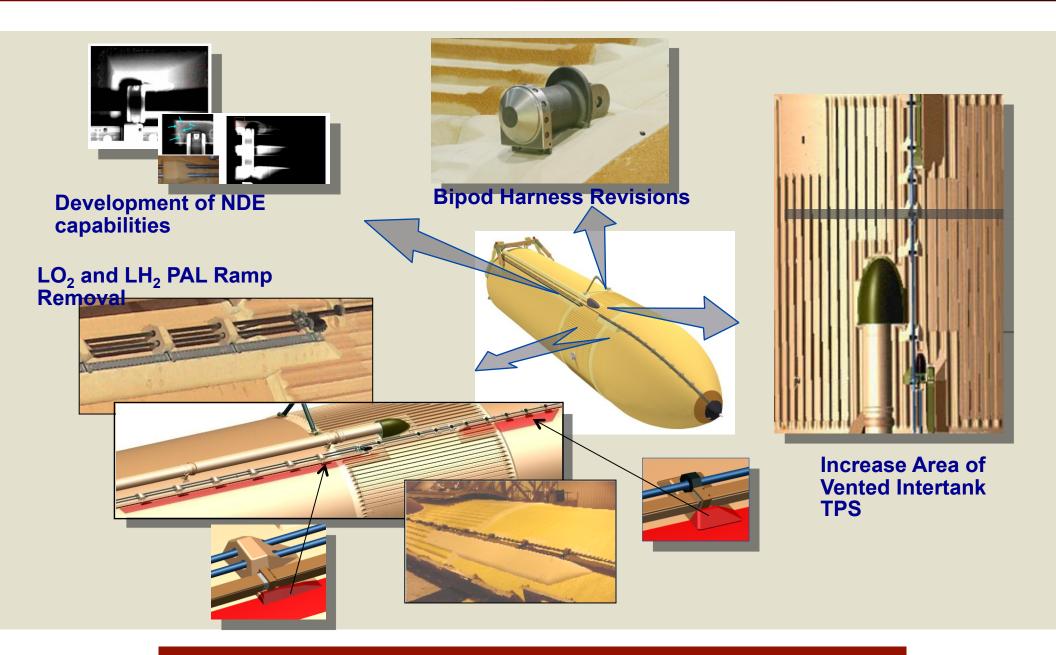

RTF II: Following STS-114, additional foam debris risk mitigation included elimination of the PAL ramps

# STS-124, External Tank - 128 First in-line Tank, LH<sub>2</sub> Ice Frost Ramps & LOX Feedline Brackets

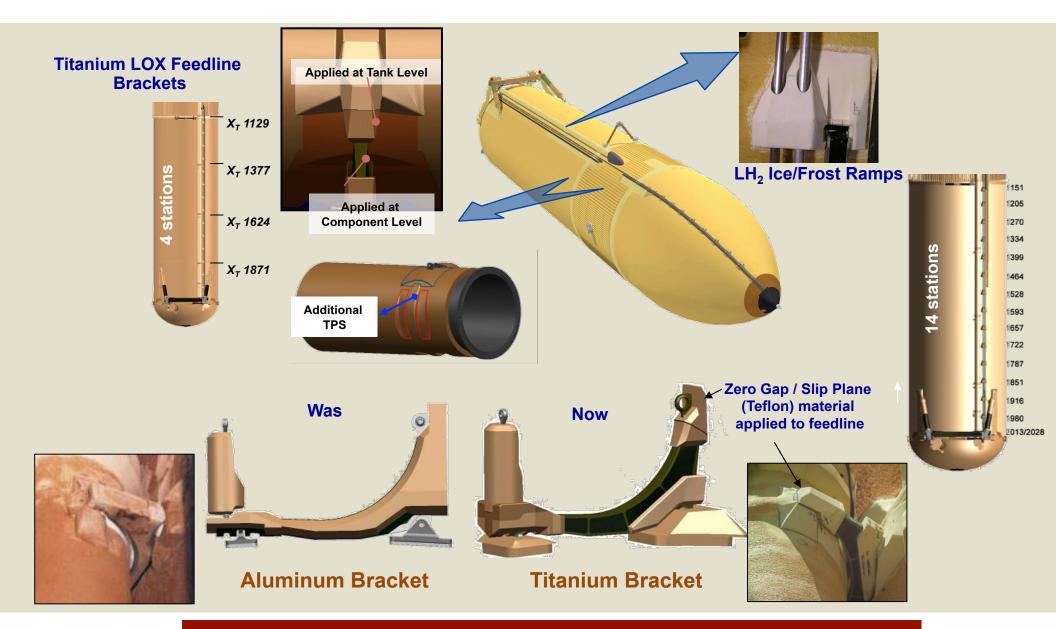

Beginning with ET-128 risk mitigation was integrated into the original build. Additional risk mitigation included LH<sub>2</sub> IFRs and LOX feedline titanium brackets.


## Reusable Solid Rocket Booster (RSRB)

#### Reusable Solid Rocket Motor Process Flow



Transport To Utah SRB Recovery

## **Reusable Solid Rocket Booster Changes**

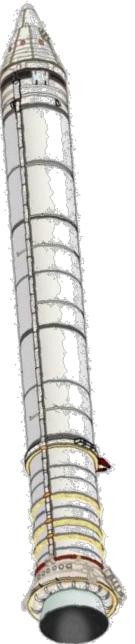

Larger Main Chutes STS-14 41D 1984



360 degree ETA Ring STS-26 1988



Aft Skirt Structural Reinforcement STS-95 1998



Vehicle Imagery Addition STS-121 2006



Command Receiver/
Decoder (CRD)
STS-118 2007



1984 1986 1988 1990 1992 1994 1996 1998 2000 2002 2004 2006 2008 2009





North American Rayon Corporation Nozzle Material STS-57 1993



MCC-1 (External Insulation) STS-79 1996




BSM Redesign / Vendor Change STS-122 2008




Fwd Segment Propellant Grain Redesign STS-125 2008



# Reusable Solid Rocket Booster (RSRB) SRB Process Flow

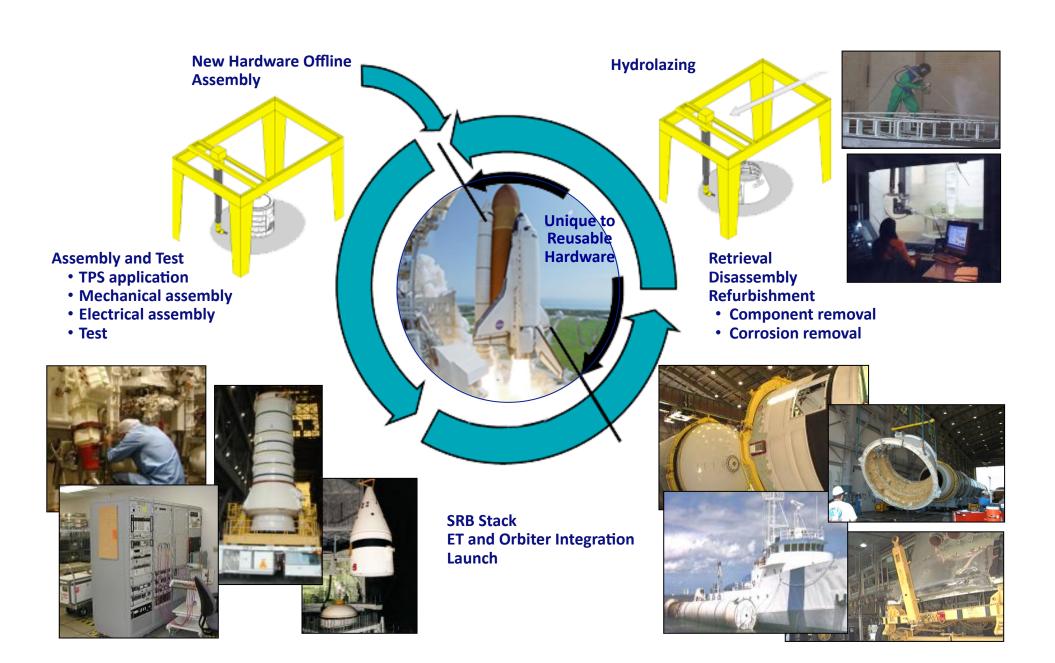

# Reusable Solid Rocket Booster (RSRB) SRB Overall Verification Program

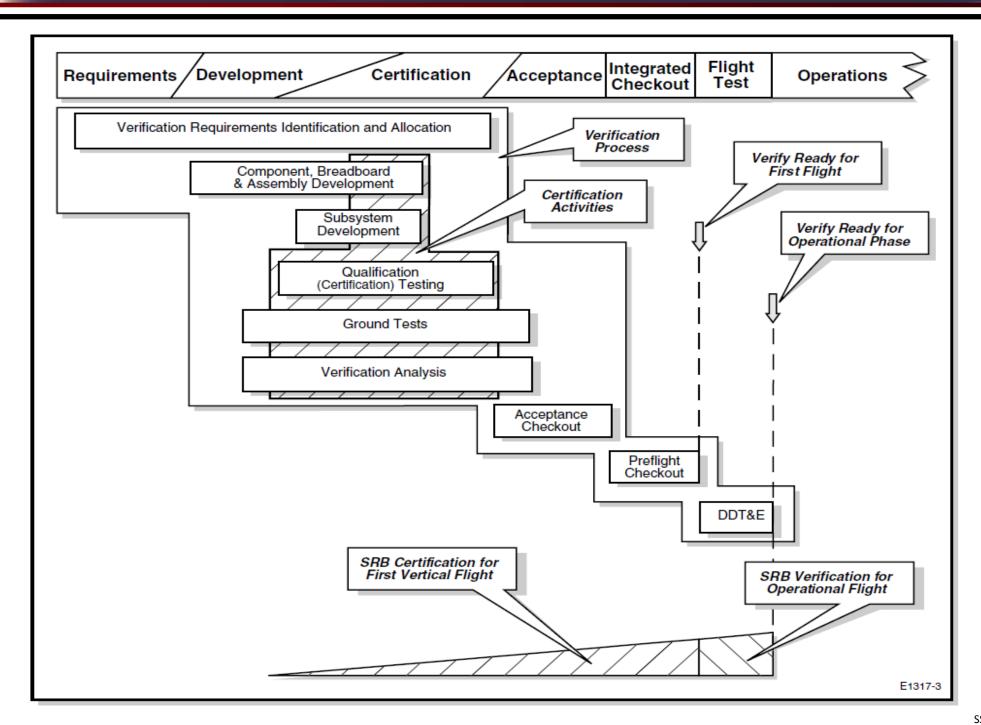

## Main Propulsion Test Article (MPTA) Testing

### Scope:

The Main Propulsion Test Article will integrate the main propulsion subsystem with the clustered Space Shuttle Main Engines, the External Tank and associated GSE. The test program consists of cryogenic tanking tests and short- and long duration static firings including gimbaling and throttling. The test program will be conducted on the S1-C test stand (Position F-2) at the National Space Technology Laboratories (NSTL).

### **Configuration:**

The main propulsion test article shall consist of the three space shuttle main engines, flight weight external tank, flight weight aft fuselage, interface section and a boilerplate mid/fwd fuselage truss structure.

## Main Propulsion Test Article (MPTA) Testing

### **MPTA Accomplishments**

- Qualification of the Shuttle cross-feed system (ET along side the Orbiter)
- Integration of SSME into the Orbiter
- Qualification of liquid delivery system hardware
- Qualification of gaseous pressurization system hardware
- Validation of structural and POGO models
- Development of loading and draining procedures/software

# Main Propulsion Test Article (MPTA) Testing

### **Results:**

3 tanking tests and 20 hot fire tests conducted between December 21, 1977 and December 17, 1980

#### **MPTA Data**

•Attempts to static fire	20
•Failure to get SSME ignition	2
•Tests planned for full duration (500+ secs)	14
•Tests full duration accomplished	6
•Tests planned duration accomplished	10
•Tests with high percentage of objectives met	12
•Engine Total Seconds	10,813